


Alco Cable Gland



Size :	G204 to G755
Standard :	121: Part-1:2005, EN 50262:1999, IEC62444:2010
Function :	Provides mechanical cable retention & electrical continuity via armoured wire termination in dry indoor area for all types of SWA cables.
Ingress Protection:	IP2X
Material:	Brass CW614N, Stainless Steel 316L
Thread:	Metric
Operating Temp:	-60°C to +200°C
Cable Type:	Single Wire Armour (SWA) Cable
Features:	Armoured Ring
Accessories:	PVC Shroud and Earth Tag.

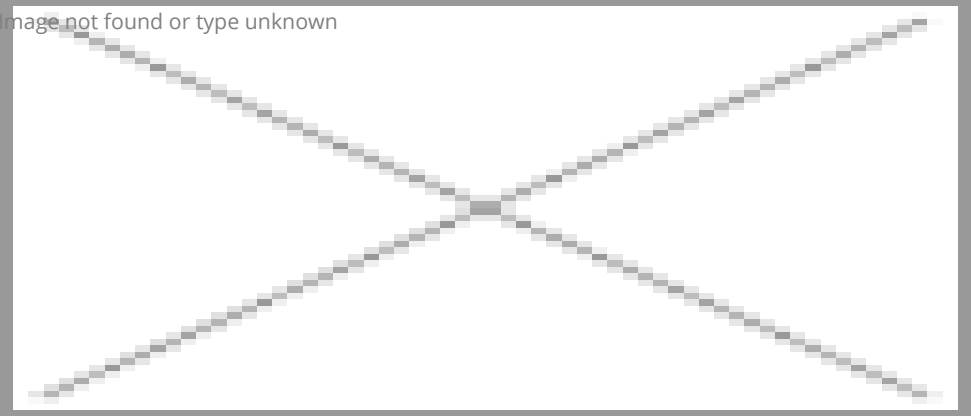

Table

Size	Thread "C"	Thread Length "D"	Cable Dia.		Armour Wire Dia.	Protrusion Length "F"	A/F	A/C	CAT NO.
	Metric		"A" Max.	"B"Max.					
G-204	20	10.00	12.50	16.00	0.90-1.25	17.00	24.25	26.20	MCG-204
G-206	20	10.00	15.00	20.00	0.9-1.25	17.50	26.20	26.20	MCG-206

G-254	25	10.00	18.50	24.00	1.25-1.60	19.00	33.00	33.00	MCG-254
G-256	25	10.00	20.50	27.00	1.25-1.60	20.25	35.00	39.20	MCG-256
G-324	32	10.00	27.25	34.00	1.60-2.00	20.50	45.00	50.00	MCG-324
G-326	32	10.00	27.25	34.00	1.60-2.00	20.50	45.00	60.00	MCG-326
G-405	40	10.00	31.00	37.50	2.0-2.50	21.00	50.00	65.00	MCG-405
G-503	50	15.00	34.50	41.00	2.00-2.50	22.00	52.00	75.00	MCG-503
G--505	50	15.00	41.00	48.00	2.50	21.50	61.50	80.00	MCG-505
G-636	63	15.00	44.50	54.00	2.50	24.25	65.00	85.00	MCG-636
G-753	75	15.00	51.50	59.00	2.50-3.15	26.00	72.00	95.00	MCG-753
G-755	75	15.00	56.75	65.00	2.50	26.00	80.00	100.00	MCG-755

Dimensions are in mm